


Building with stylish exterior cladding

Facade boards are manufactured from high quality Nordic uniform quality wood, strong spruce. The products have been sawn to be heartwood free, the used face is always the fine sawn heartwood side, this helps prevent drying out and splitting. Densely grained heartwood combined together with the priming paint provides good resistance to stresses caused by fluctuations in the weather conditions.

Facade board priming is done in a supervised manner, in the warm and under a controlled environment. The industrial priming protects the cladding in transport, storage and installation. By purchasing pre-primed exterior cladding boards, it will save you time and effort.

Prepackaged, ready primed POLKKYpanel-exterior cladding panels are suitable for both new and renovation construction. Installation is quick and easy.

Std products: UTV, UTK and dimensions/std measurement 20 x 95/120/145

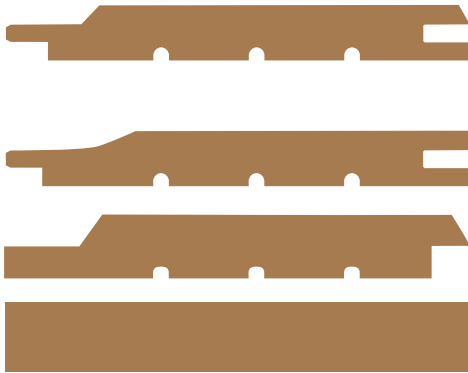

Profiili	Paksuus mm	Leveys mm
UTV	20	95/120/145
UTV	23	120/145
UTV	28	170
UTK	20	120/145
UTK	23	145
UYV	23	120
MITT	20	95/120/145
MITT	18	95/120



In addition to standard products, also available in custom lengths and profiles.

Quality and humidity

Uniform spruce timber, densely grained and solid knots with a moisture content of 18 %.

Lengths

Planks sold in falling lengths 3,6 - 5,4 m or in fixed lengths i.e. 3,0 m.

Dressed

Hienosahattu pinta, sydänpuoli käyttölappeena. Päätyponttaus mahdollinen tilauksesta.

Työstöt

Fine-sawn face, the heartwood face side. End grooving on order request.

Surface treatment

Primer painted eco-friendly, water-based alkyd paint. The final painting can be done with any conventional house paint. Standard colour is white, other colours on request.

Manufacturer

Pölkky Oy, Kemijärventie 73, 93600 Kuusamo, FINLAND
Tel. +358 (0)20 764 0200 | office@polkky.fi



OFFICIAL WOOD SUPPLIER OF SANTA CLAUS

© SANTA CLAUS FOUNDATION™

Laivausmerkit

US E★R
Y E-R
VI E★R★
SF E★R

